Instruction Manual

TYPHOON UNPLUGGED OFFICE MOUSE

Art: 40800

07/2003

HOTLINE:
GERMANY TEL: 0180-5897466 (Mo.- Fr. 10:00 - 19.00Uhr 0,12ct/min.)
INTERNATIONAL TEL: 00800-22558974
http://www.typhoonline.com
E-Mail: service@anubisline.com

GB

Notice:
Federal Communications Commission (FCC) requirements, Part 15
This equipment has been tested and found to comply with the limits for a class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation.
This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:
--Reorient or relocate the receiving antenna.
--Increase the separation between the equipment and receiver.
--Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
--Consult the dealer or an experienced radio/TV technician for help.

CAUTION: Any changes of modifications not expressly approved by the grantee of this device could void the user's authority to operate the equipment.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Congratulations on your purchase of the Typhoon Unplugged Office Optical Mouse. With the latest modern and symmetric shape design, the Office Mouse fit perfectly on your right or left hand. Please read carefully the User's Quick Guide to learn about the installation and the powerful functions of your new Office Wireless Optical Mouse.

1. Contents in the Package

- ✓ Unplugged Office Optical Mouse (Ergonomic or Symmetric)
- ✓ Chargeable Mouse Cradle (PS/2, USB or UP Combo)
- ✓ Two AA Batteries
- ✓ Office Mouse Driver CD-ROM or disk
- ✓ User's Quick Guide

Optional Parts for Unplugged Office Optical Mouse
(These optional parts may be different on different wireless optical mice versions)

- AC to DC Adaptor
- USB to DC Cable

2. Hardware Installation

a) Connect the Receiver to Your Computer

I. Please turn off your computer.

II. Plug the connector of the receiver into the PS/2 or USB port of the computer. As indicator on the image below, use the included USB–to-PS/2 converter for connection directly to the PS/2 mouse port.

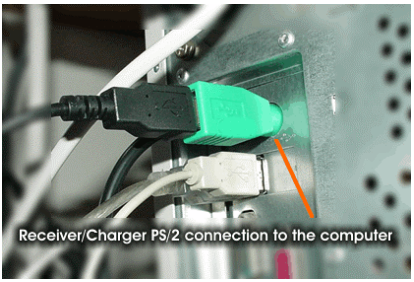

b) Select the Channel

I. The two-channel switch is located under the belly of the mouse, right inside the battery compartment. Select either Channel “1” or “2” as long during operation there are no adverse Radio interferences to the mouse. Else please choose the next number or re-synchronize with the Receiver to change the ID.

II. Insert the batteries into the battery compartment. Please pre-charge the batteries first for 10 – 12 hours before initial use.

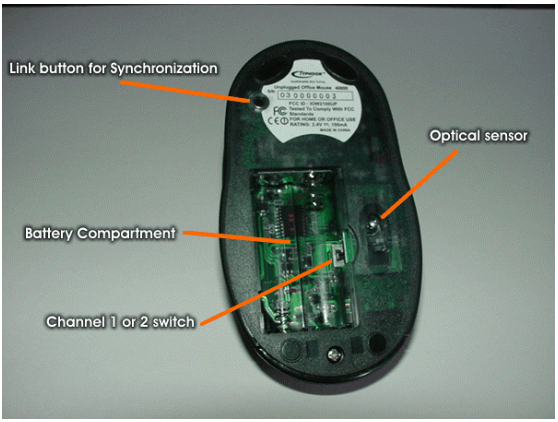

c) Link the Mouse with the Receiver (Synchronization)

I. Connect the included power adapter to the Receiver/Charger back and to a 230V AC power source.

II. Turn on the Computer and the LED indicator on the receiver will light up in green.

III. Press the ID Link Button on the receiver and the LED indicator will blink. The receiver is ready to automatically link with the mouse.

IV. Press the ID Link Button on the back of the mouse. The indicator will stay lighted when successfully completing the linkage (synchronization).
V. The LED indicator will blink whenever you move the mouse.
VI. If you need to re-link the mouse or after changing the mouse batteries, please repeat the above link synchronization step 2b ~ 2IV.
VII. If the selected channel is interfered by other wireless-mouse users nearby, please change the Link ID by re-synchronization or select the other channel immediately and then re-synchronize.
VIII. There are 256 Link IDs per channel.

3. Driver Installation

Notice:

The driver supports Windows 98 SE, Windows NT (PS/2 only), Windows 2000, Windows ME and Windows XP.

a) Insert the driver CD-ROM or disk to your computer. The PC system will automatically install the driver through the PC auto-run function. In the opening screen, please select the Language preferred as shown in the list and click on “Next”.

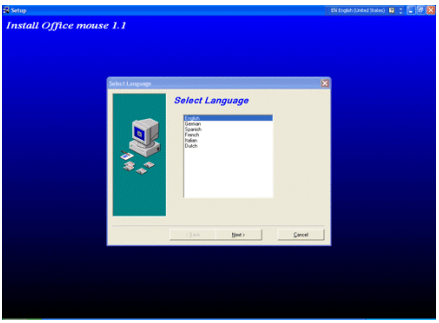

b) If the PC system does not have the auto-run function enabled, please double click the file “Setup.exe” in the CD-ROM and follow the setup instructions to complete the driver installation.

I. Welcome to the Office mouse 1.1 installation program, please click on “Next” to begin.

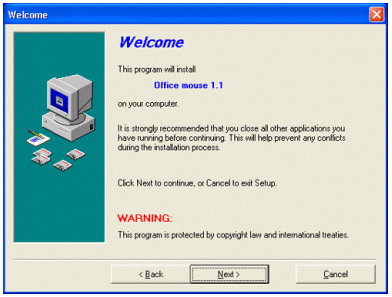
Welcome
Welcome
This program will install
Office mouse 1.1
on your computer.
It is strongly recommended that you close all other applications you have running before continuing. This will help prevent any conflicts during the installation process.
Click Next to continue, or Cancel to exit Setup.
WARNING:
This program is protected by copyright law and international treaties.
< Back
Next >
Cancel

II. Read the Information screen first, then click on “Next” to continue.

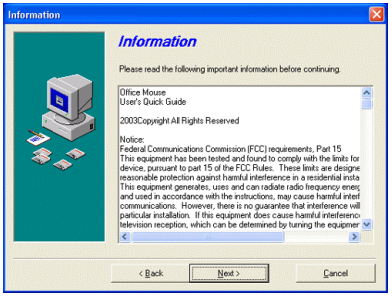

III. Input the preferred target directory or click on “Browse” to find the folder of choice. Else click on “Next” to use the default assigned directory.

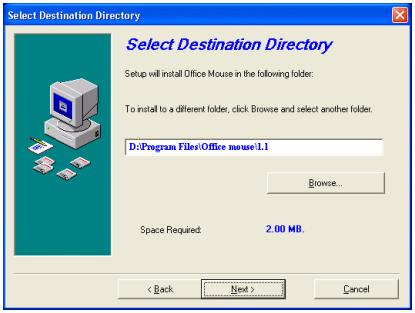
Select Destination Directory
Select Destination Directory
Setup will install Office Mouse in the following folder:
To install to a different folder, click Browse and select another folder.
D:\Program Files\Office mouse\1.1
Browse...
Space Required:
2.00 MB.
< Back
Next >
Cancel

IV. Select the Program folder to add to, or simply click on “Next” to use the default by adding to the main folder area.

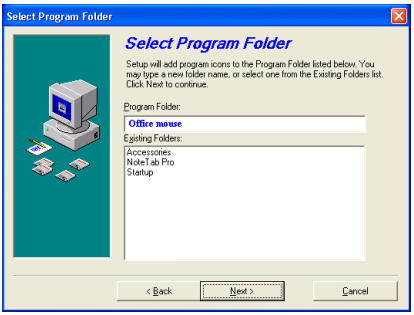
Select Program Folder
Select Program Folder
Setup will add program icons to the Program Folder listed below. You may type a new folder name, or select one from the Existing Folders list. Click Next to continue.
Program Folder:
Office mouse
Existing Folders:
Accessories
NoteTab Pro
Startup
< Back
Next >
Cancel

V. Click on “Next” to begin the files transfer process.

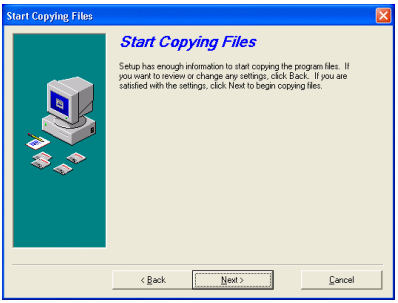
Start Copying Files
Start Copying Files
Setup has enough information to start copying the program files. If you want to review or change any settings, click Back. If you are satisfied with the settings, click Next to begin copying files.
< Back
Next >
Cancel

VI. Driver and Application files copying and installation in progress.



VII. For Windows XP users, when prompted with the screen on the right, please click on “Continue Anyway” to carry on the installation process.

Hardware Installation
The software you are installing for this hardware:
PS/2 Mouse Filter Driver
has not passed Windows Logo testing to verify its compatibility with Windows XP. (Tell me why this testing is important.)
Continuing your installation of this software may impair or destabilize the correct operation of your system either immediately or in the future. Microsoft strongly recommends that you stop this installation now and contact the hardware vendor for software that has passed Windows Logo testing.
Continue Anyway
STOP Installation

VIII. The final window below indicates completion of both driver and application installation.

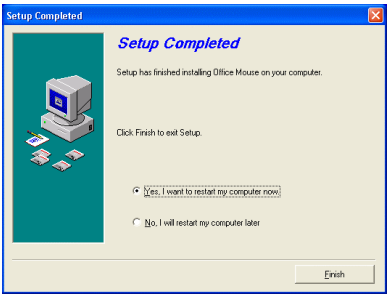
Setup Completed
Setup Completed
Setup has finished installing Office Mouse on your computer.
Click Finish to exit Setup.
Yes, I want to restart my computer now.
No, I will restart my computer later
Finish

IX. Please make sure the selection is on the “Yes, I want to restart my computer now”, click on “Finish” to rest the system. This is needed to load the driver and the application into Windows.

c) A Mouse Setup applet will appear on the task bar of Windows after you have successfully completed the installation.

d) Restart the computer.

e) Double click the Mouse Setup applet and then follow the instructions of the selection items to set the mouse properties.

f) If you select “Setting”, you are able to setup the Wheel and Button of the Office mouse. Under the Wheel tap, the Wheel mode and speed can be adjusted. Under the Button tab, the 3 programmable buttons can be assigned to specific functions or tasks. Select the button with the downward arrow to open a list of tasks as shown on the right images.



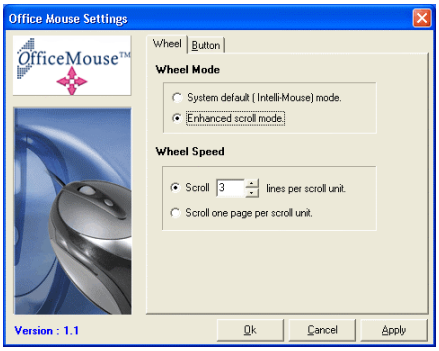



g) If you select “Active Mouse Properties”, you are able to make many preferred adjustment to the mouse capabilities.

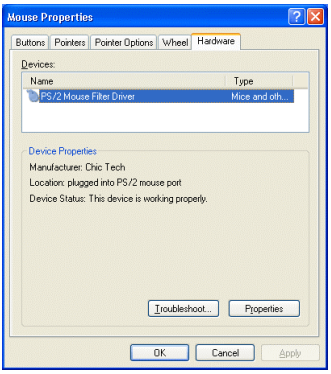

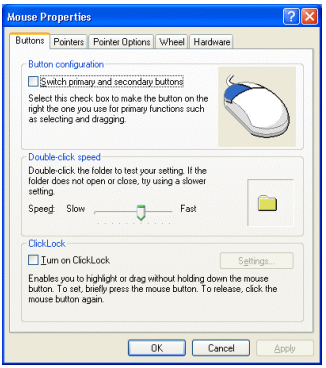
Mouse Properties
Buttons
Pointers
Pointer Options
Wheel
Hardware
Button configuration
Switch primary and secondary buttons
Select this check box to make the button on the right the one you use for primary functions such as selecting and dragging.
Double-click speed
Double-click the folder to test your setting. If the folder does not open or close, try using a slower setting.
Speed:
Slow
Fast
ClickLock
Turn on ClickLock
Settings...
Enables you to highlight or drag without holding down the mouse button. To set, briefly press the mouse button. To release, click the mouse button again.
OK
Cancel
Apply

Office Application Software introduction:

h) You can simply apply the Office application functions through the one-touch hot key on the top of the Office mouse.

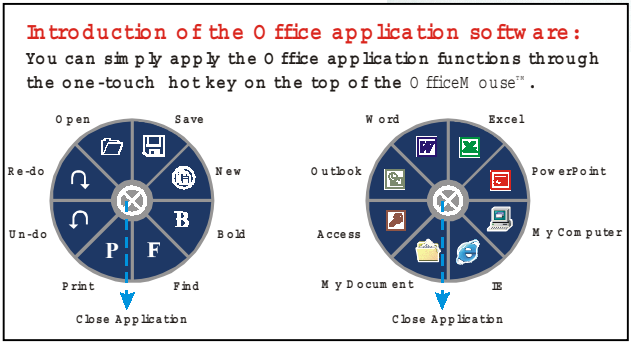

4. Optional Charging Modes for Unplugged Office Optical Mouse
Notice:
There are two charging modes. Some mice versions may have only one charge mode. Please use rechargeable batteries for the chargeable mouse.

a) Charge from the PC
- Connect the mouse to the USB port of the computer with the USB to DC cable.

b) Charge from the Cradle
- The cradle must be connected with the required AC to DC adaptor in advance and then place the mouse on the cradle precisely.

5. Charging Notice
- For first time usage, please charge the AA batteries at least 10 to 12 hours.
- The LED indicator or the scroll wheel on the mouse will light when the mouse batteries are low in power. Please recharge or change the batteries immediately.
- Press any button to wake up the mouse while the mouse is in the sleeping mode during charging, else the mouse will not charge properly.

- end -